



KR 360 R2830



Technical data

| | |
|--|-------------------|
| Maximum reach | 2826 mm |
| Rated payload | 360 kg |
| Maximum payload | 472 kg |
| Maximum supplementary load, rotating column / link arm / arm | - |
| Pose repeatability (ISO 9283) | ± 0.08 mm |
| Number of axes | 6 |
| Mounting position | Floor |
| Footprint | 1050 mm x 1050 mm |
| Weight | approx. 2385 kg |

Axis data

| | |
|--------------------------|----------------|
| Motion range | |
| A1 | ±185 ° |
| A2 | -130 ° / 20 ° |
| A3 | -100 ° / 144 ° |
| A4 | ±350 ° |
| A5 | ±120 ° |
| A6 | ±350 ° |
| Speed with rated payload | |
| A1 | 100 °/s |
| A2 | 90 °/s |
| A3 | 90 °/s |
| A4 | 120 °/s |
| A5 | 110 °/s |
| A6 | 160 °/s |

Operating conditions

| | |
|--------------------------------------|---------------------------------|
| Ambient temperature during operation | 10 °C to 55 °C (283 K to 328 K) |
|--------------------------------------|---------------------------------|


Protection rating

| | |
|--|------|
| Protection rating (IEC 60529) | IP65 |
| Protection rating, robot wrist (IEC 60529) | IP65 |


Controller

| | |
|------------|-----------------|
| Controller | KR C5; KR C4 |
|------------|-----------------|

Workspace graphic

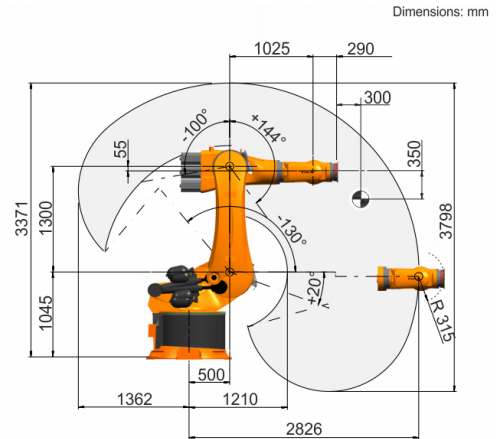

Payload diagram

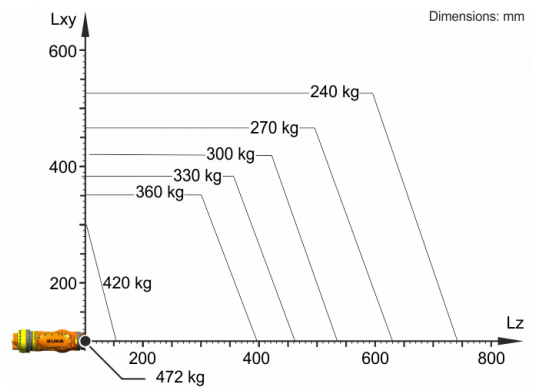

The KR 360 R2830 is designed for a rated payload of 360 kg in order to optimize the dynamic performance of the robot. The maximum payload of 472 kg applies only if the position of the center of mass is 0 mm and a supplementary load optimized for the load case is mounted. The specific load case must be verified using KUKA.Load or KUKA Compose. For further consultation, please contact KUKA Support.

Mounting flange

